


Accessories

	Description
Mechanical accessories	Stem heating ZR24-1 ¹⁾
	Pipe connector ZR23..
	¹⁾ No stem heating is available for R3..K

Dimensions and weights

Dimensional drawings

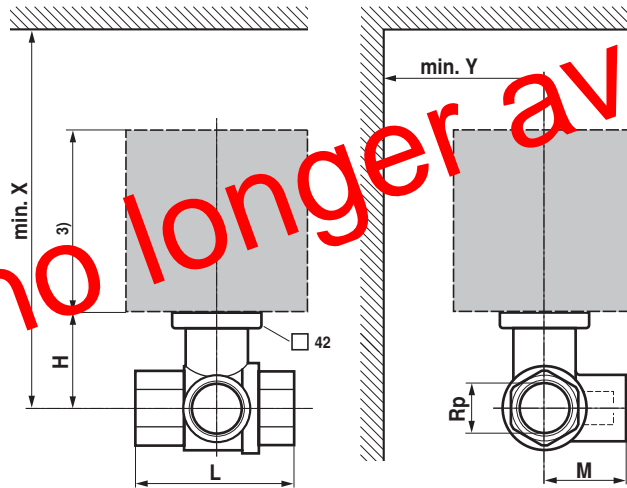

DN [mm]	L [mm]	H [mm]	M [mm]	Rp [Inches]	L1 ¹⁾ [mm]	X ²⁾ [mm]	Y ²⁾ [mm]	Weight [kg]
10	52	35	28	3/8"	10	220	90	0.35
15	67	45	39	1/2"	13	220	90	0.45
20	78	47.5	41.5	3/4"	13	220	90	0.6
25	87	47.5	45	1"	17	220	90	0.9
32 R329	105	47.5	55.5	1 1/4"	19	220	90	1.2
32 R331	105	52	55.5	1 1/4"	19	230	90	1.3
40 R338	111	52	56	1 1/2"	19	230	90	1.5
40 R339G	122	64	67	1 1/2"	19	245	90	2.0
50 R348	125	58	68	2"	22	240	90	2.4
50 R3..G(-A)	142	70	79	2"	22	255	90	2.0

¹⁾ Maximum installation depth.

²⁾ Minimum distance with respect to the valve centre.

³⁾ The actuator dimensions can be found on the respective actuator data sheet.

Further documentations

- Complete overview «The complete range of water solutions»
- Data sheets for actuators
- Installation instructions for ball valves resp. actuators
- Notes for project planning (hydraulic characteristic curves and circuits, installation regulations, commissioning, maintenance etc.)

